


# AOM701 to AOM713WP

## Swap out instructions

Remove the **AOM701** monitor panel, Intermediate harness, connection cable and power harness from the existing system. The main camera cable will remain.

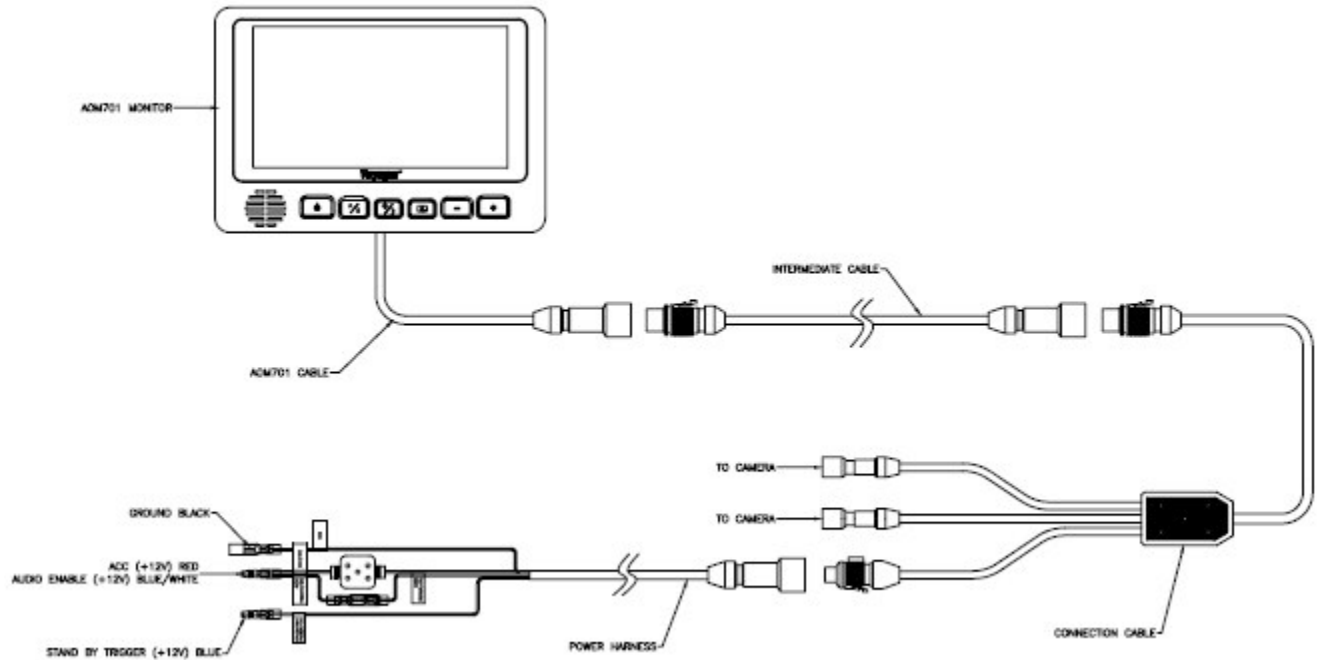

Install the **AOM713WP** monitor panel and junction box to the intermediate harness and power harness from the existing system. Your camera cable will connect into the **CA1**, **CA2**, or **CA3** inputs.

